

SRA-300 SERIES Remote Multiplex Annunciators




SRAM-332TZ in an SBB-301R enclosure.

Features

- Large capacity of annunciation
- Bi-colored LEDs
- Slide-in labels for each display point
- Surface mount to standard gang outlet boxes
- Sealed membrane-like buttons and LED indicators
- Local Buzzer, Silence and Lamp Test switches
- LEDs for A.C. On, Common Trouble, Remote Failure, Aux. Disconnect, Acknowledge, General Alarm, Signal Silence and Test/Configuration Mode
- Controls for System Reset, Lamp Test, Fire Drill, Aux. Disconnect, Buzzer Silence, Signal Silence, General Alarm and Acknowledge

Description

Summit's modular SRA-300 Series Remote Annunciators are multiplex annunciator panels that provide a large capacity of annunciation with the standard Summit SFC-300 Series Fire Alarm Control Panels. Defined via DIP switches, the SRA-300 Remote Annunciators are automatically configured to match the SFC-300 Series Fire Alarm Control Panel configuration.

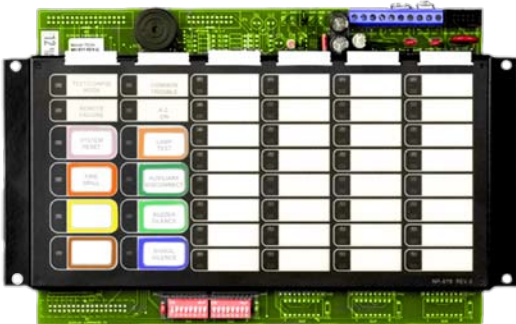

SRAM-332TZ Remote Annunciator


The SRAM-332TZ Remote Annunciator provides control, indication of common annunciator functions and up to 32 points of annunciation. The SRAM-332TZ comes standard with Bi-colored LEDs for Alarm (Red) or Supervisory (Amber) and 32 Trouble LEDs. Each display point can be identified by the slide-in label that slides in beside the LED. Equipped with sealed membrane-like buttons and LED indicators, the SRAM-332TZ has a Local Buzzer as well as indicators for A.C. On, Common Trouble, Remote Failure, Aux. Disconnect, Acknowledge, General Alarm, Signal Silence and Test/Configuration mode. In addition it has controls for System Reset, Lamp Test, Fire Drill, Auxiliary Disconnect, Buzzer Silence, Signal Silence, General Alarm and Acknowledge. The SRAM-332TZ allows for the control switches to be disabled on a per function basis for areas that do not require certain Common Control functions to be remotely located from the Fire Alarm Control Panel. The slide-in labels are easily customized to reflect the omission of those control switches. It mounts in an SBB-300 Series enclosure.



S24011



S24011

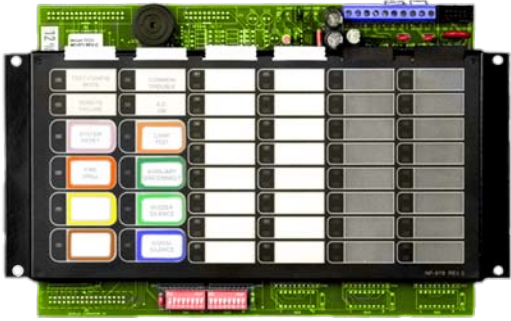

SRAM-316TZ Remote Annunciator

The SRAM-316TZ Remote Annunciator provides control, indication of common annunciator functions and up to 16 points of LED annunciation. The SRAM-316TZ comes standard with 16 bi-colored LEDs for Alarm (Red) or Supervisory (Amber) and 16 Trouble LEDs. The SRAM-316TZ is equipped with the same functions and features as the SRAM-332TZ Remote Annunciator and mounts in an SBB-301R enclosure.



SRAX-348TZ Adder LED Annunciator

The SRAX-348TZ Adder LED Annunciator Module is used with the SRAM-332TZ to provide an additional 48 points of LED annunciation. The SRAX-348TZ is equipped with 48 bi-colored LEDs for Alarm (Red) or Supervisory (Amber) and 48 Trouble LEDs. The SRAX-348TZ connects to the SRAM-332TZ and mounts in a SBB-300 Series enclosure.




SBB-300 Semi-Flush Enclosures

The SBB-300 Series enclosures come complete with a backbox, door and hinge. The enclosure doors come with a lexan window, two keys and a durable lock. The doors come hinged to the left side of the box. The SBB-300 Series enclosures are available in three different models.

SBB-300 Enclosure Dimensions

- SBB-301R 9"H x 12.75"W x 1.2"D
- SBB-302R 18"H x 12.75"W x 1.2"D
- SBB-303R 26.4"H x 12.75"W x 1.2"D

Typical Remote Annunciator Wiring Diagram

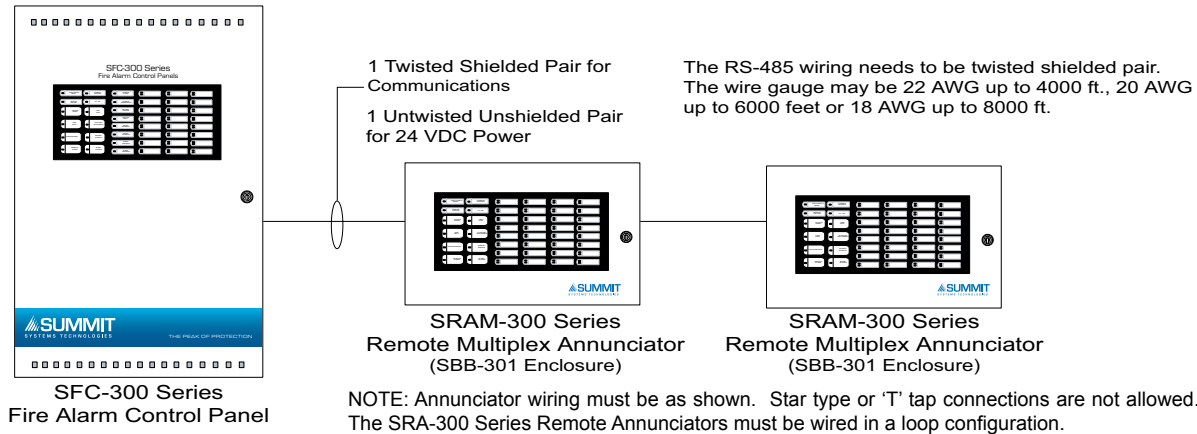

Ordering Information

Model Number	Description
SRAM-316TZ	Main Annunciator Module c/w Common Control Features, Indicators and 16 Bi-Colored LEDs and 16 Trouble LEDs
SRAM-332TZ	Main Annunciator Module c/w Common Control Features, Indicators and 32 Bi-Colored LEDs and 32 Trouble LEDs
SRAX-348TZ	Adder Annunciator Module c/w 48 Bi-Colored LEDs and 48 Trouble LEDs
SBB-301R	Annunciator backbox with keylock door (Houses 1 module)
SBB-302R	Annunciator backbox with keylock door (Houses 2 modules)
SBB-303R	Annunciator backbox with keylock door (Houses 3 modules)

